



Tested to VDI 6022




Eurovent certification



ATEX construction optional

Pocket filters

PFN

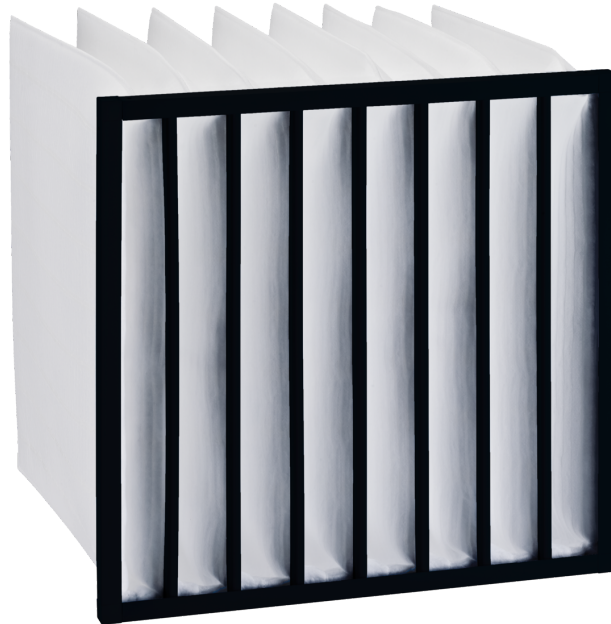

Prefilters or final filters in ventilation and air conditioning systems

Pocket filters for the separation of fine dust

- Filter groups ePM10 and ePM1 (fine dust filters)
- Performance tested to ISO 16890
- Eurovent certification for fine dust filters
- Meets the hygiene requirements of VDI 6022
- High energy efficiency class according to Eurovent
- NanoWave® medium, sewn
- Enlarged filter area due to filter pockets
- NanoWave® medium with extremely low initial differential pressure and highest possible dust holding capacity, ideal flow conditions due to wedge-shaped filter pockets
- Different numbers of pockets and pocket depths
- Quick installation and filter changing times due to easy, safe handling
- Fitting into standard cell frames for filter walls (type SIF) or into universal casings (type UCA) for duct installation

Optional equipment and accessories

- Front frame made of plastic or galvanised sheet steel

ATEX construction for protection zones 1 and 2 as well as 21 and 22

General information	2	Order code	5
Technical data	3	Dimensions	6
Specification text	4		

General information

Application

- Pocket filter made of NanoWave® medium type PFN for the separation of fine dust
- Fine dust filter: Prefilter or final filter in ventilation systems

Classification

- Eurovent certification for fine dust filters
- Hygiene conformity
- Certificate of conformity for use in areas with a potentially explosive atmosphere

Nominal sizes

- B × H × D [mm]

Filter classes

Filter groups

- ISO ePM10 to ISO 16890
- ISO ePM1 to ISO 16890

Filter classes

- ePM10 60 %
- ePM1 65 %
- ePM1 90 %

Construction

- PLA: Frame made of plastic
- GAL: Frame made of galvanised steel
- EX: Protection zones 1 and 2, as well as 21 and 22 (only in combination with GAL)

Useful additions

- Filter wall (SIF)
- Universal casing (UCA)

Construction features

- Wedge-shaped filter pockets
- Multi-layer filter medium with a prefilter layer and a layer of corrugated extra fine fibres
- Frame depth of construction PLA: 25 mm
- Frame depth of construction GAL: 20, 25 mm
- Number of pockets: 3, 4, 5, 6, 7, 8, 10

Materials and surfaces

- Filter media made of synthetic fibres in corrugated structure
- Frame made of plastic or galvanised sheet steel

Standards and guidelines

- Test according to ISO 16890; international standard for general room air distribution; classification of arrestance efficiency based on the measured fractional arrestance efficiency, which is processed into a reporting system for the fine dust arrestance efficiency (ePM)
- For fine dust filters, the fractional arrestance efficiency of a certain size range is determined by aerosols (DEHS and KCl)
- The filters are classified into filter groups ISO ePM10 and ISO ePM1 depending on the tested values
- Hygiene conformity for construction PLA: VDI 6022, VDI 3803, DIN 1946 Part 4, ÖNORM H 6021 and ÖNORM H 6020, SWKI VA 104-01 and SWKI 99-3, and EN 16798
- Certificate of conformity for correct use in areas with a potentially explosive atmosphere in accordance with Directive 2014/34/EU and compliance with basic health and safety requirements in accordance with EN 80079-36:2016 and EN 80079-37:2016

**Technical data**

Fractional efficiency ePM10 [%] to ISO 16890	60	–	–
Fractional efficiency ePM1 [%] to ISO 16890	–	65	90
Initial differential pressure [Pa] at nominal volume flow rate	60	80	130
Maximum operating temperature [°C] for frames made of plastic	60	60	60
Maximum operating temperature [°C] for frames made of galvanised sheet steel	90	90	90

Specification text

This specification text describes the general properties of the product. Texts for variants can be generated with our Easy Product Finder design program.

Specification text

Pocket filter PFN made of NanoWave® medium as prefilters or final filters for the separation of fine dust in ventilation and air conditioning systems. Wedge-shaped filter pockets ensure ideal airflow conditions. Highest possible dust holding capacity with an extremely low initial differential pressure due to a multi-layer filter medium with a prefilter layer and a layer of corrugated extra fine fibres. Pocket filters made of NanoWave® medium are available in standard sizes with variable numbers of pockets and pocket depth, filter groups ePM10 and ePM1 according to ISO 16890. Pocket filters made of NanoWave® medium are Eurovent-certified and compliant with VDI 6022 in terms of hygiene. The PFN-EX pocket filters with optional EX protection may be used in areas with a potentially explosive atmosphere of zones 1 and 2, as well as zones 21 and 22 (EX II 2G Ex h IIC Gb and EX II 2D Ex h IIIB Db). It is mandatory to connect the filters to the earth potential. All conductive and dissipative parts must be connected together and grounded. Conductive dusts are excluded from the application. Under no circumstances should metallic foreign

materials enter the filter. Ambient temperature range: $-40\text{ °C} \geq T_a \geq +80\text{ °C}$

Materials and surfaces

- Filter media made of synthetic fibres in corrugated structure
- Frame made of plastic or galvanised sheet steel

Construction

- PLA: Frame made of plastic
- GAL: Frame made of galvanised steel
- EX: Protection zones 1 and 2, as well as 21 and 22 (only in combination with GAL)

Sizing data

- Filter group [ISO 16890]
- Efficiency [%]
- Volume flow rate [m^3/h]
- Initial differential pressure [Pa]
- Nominal size [mm]

Order code

PFN – ePM1 – 90% – PLA – 25 / 592 × 592 × 600 × 10
| | | | | | |
1 2 3 4 5 6 7

1 Type

PFN Pocket filters made of NanoWave® medium

2 Classification

ePM10 Fractional efficiency ePM10 to ISO 16890

ePM1 Fractional efficiency ePM1 to ISO 16890

3 Efficiency [%]

In accordance with ISO 16890

4 Construction

PLA Frame made of plastic

GAL Frame made of galvanised steel

Ex Protection zones 1 and 2 as well as 21 and 22 (only in combination with GAL)

5 Frame depth [mm]

20 (Only with GAL)

25

6 Nominal size [mm]

B × H × T

7 Number of pockets

3, 4, 5, 6, 7, 8, 10

PFN–ePM1–90%–PLA–25/592×592×600×10

Classification

ISO ePM1 to ISO 16890

Efficiency

90 %

Construction

Plastic frame

Frame depth

25 mm

Nominal size


592 × 592 × 600 mm

Number of pockets

10

Dimensions

Dimensional drawing of PFN-...

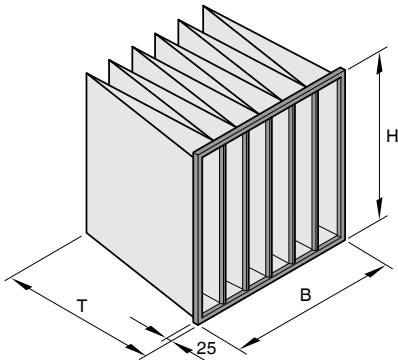

Product-specific data

Nominal size			Number of pockets	Filter class	Nominal volume flow rate		Initial differential pressure	Filter area [m ²]	Weight [kg]
B	H	T			q _v [l/s]	q _v (m ³ /h)	Δp _A [Pa]		
592	592	600	6	ePM10 60 %	944	3400	60	4.4	1.5
490	592	600	5	ePM10 60 %	778	2800	60	3.7	1.3
287	592	600	3	ePM10 60 %	472	1700	60	2.2	0.9
592	490	600	6	ePM10 60 %	778	2800	60	3.6	1.4
592	287	600	6	ePM10 60 %	472	1700	60	2.1	0.9
287	287	600	3	ePM10 60 %	236	850	60	1.1	0.5
592	892	600	6	ePM10 60 %	1417	5100	60	6.6	2
490	892	600	5	ePM10 60 %	1167	4200	60	5.5	1.6
287	892	600	3	ePM10 60 %	708	2550	60	3.3	1.1
592	592	600	8	ePM1 65 %	944	3400	80	5.9	2
490	592	600	7	ePM1 65 %	778	2800	80	5.1	1.7
287	592	600	4	ePM1 65 %	472	1700	80	2.9	1.1
592	490	600	8	ePM1 65 %	778	2800	80	4.9	1.7
592	287	600	8	ePM1 65 %	472	1700	80	2.8	1.1
287	287	600	4	ePM1 65 %	236	850	80	1.4	0.6
592	892	600	8	ePM1 65 %	1417	5100	80	8.8	2.4
490	892	600	7	ePM1 65 %	1167	4200	80	7.7	2.2
287	892	600	4	ePM1 65 %	708	2550	80	4.4	1.4
592	592	600	10	ePM1 90 %	944	3400	130	7.3	2.2
490	592	600	8	ePM1 90 %	778	2800	130	5.9	1.8
287	592	600	5	ePM1 90 %	472	1700	130	3.7	1.2
592	490	600	10	ePM1 90 %	778	2800	130	6.1	1.9
592	287	600	10	ePM1 90 %	472	1700	130	3.6	1.3
287	287	600	5	ePM1 90 %	236	850	130	1.8	0.7
592	892	600	10	ePM1 90 %	1417	5100	130	11.1	2.6
490	892	600	8	ePM1 90 %	1167	4200	130	8.8	2.3
287	892	600	5	ePM1 90 %	708	2550	130	5.5	1.5

① Nominal size ② Nominal volume flow rate ③ Initial differential pressure ④ Filter area ⑤ Weight